


# Duraline®



## LED Lighting Streamers

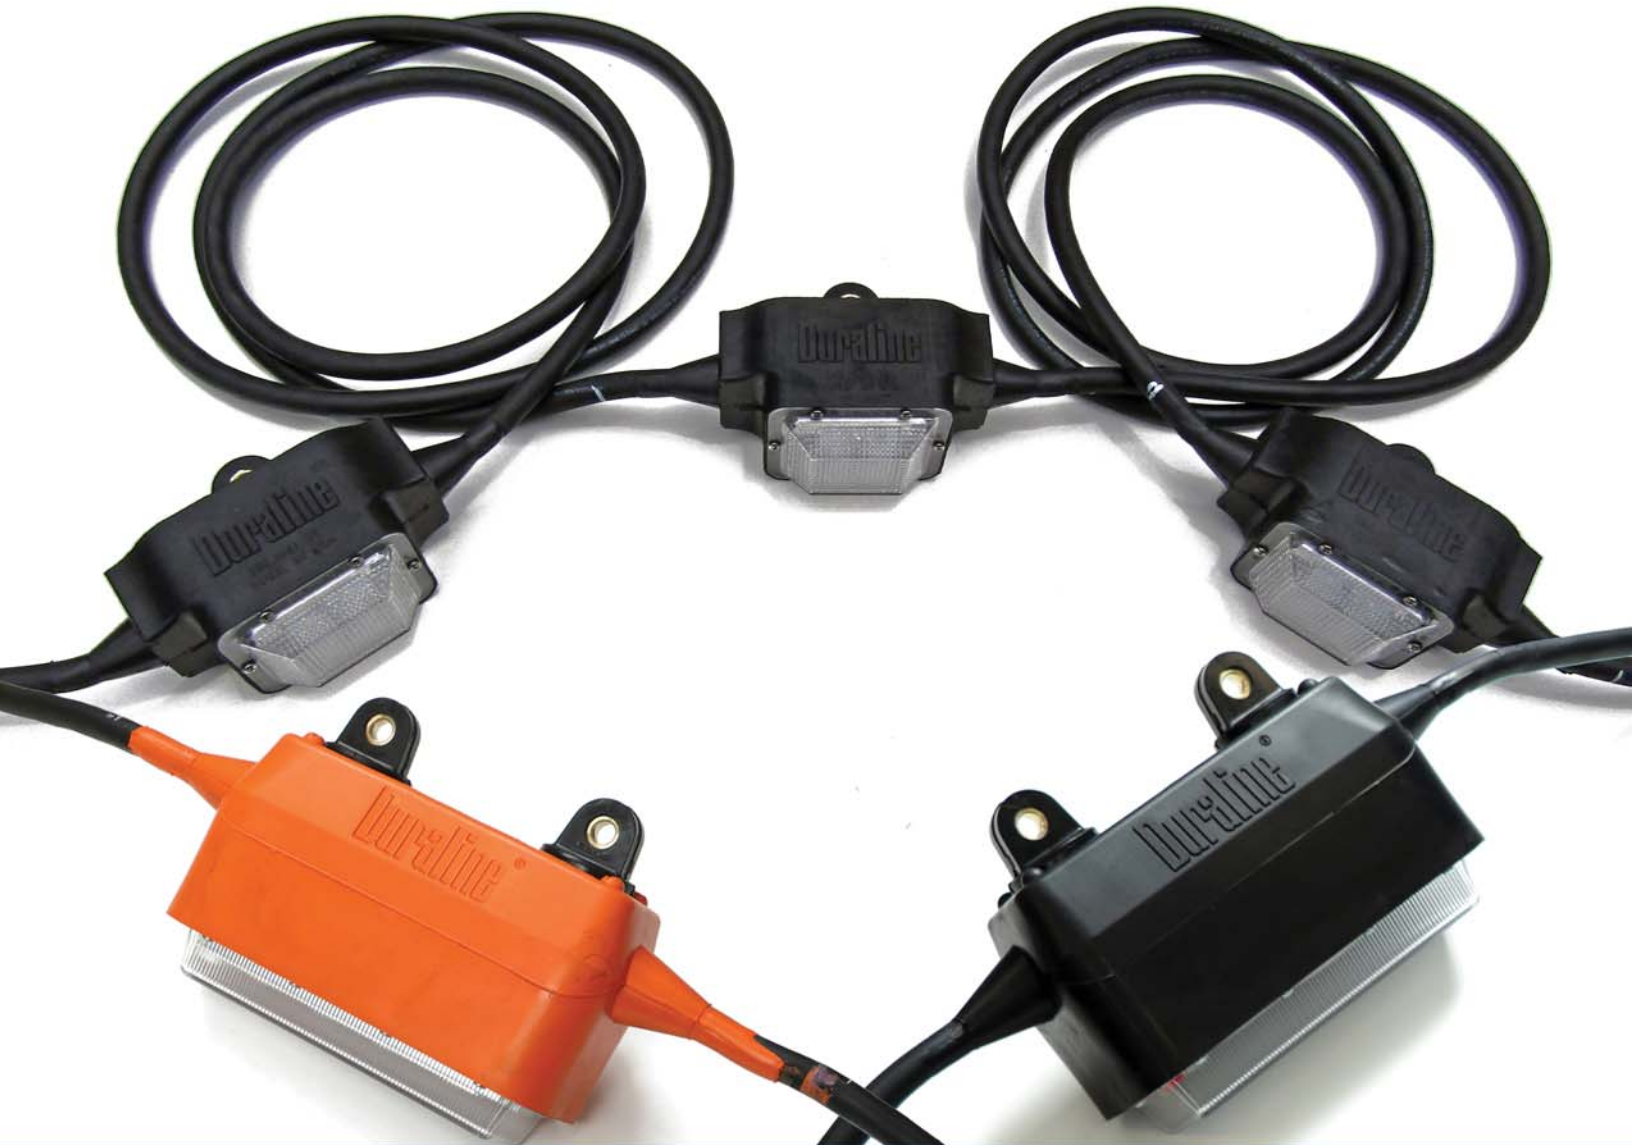

Industrial Strength Electrical Products for Industrial Strength Users







**6,500 Kelvin  
5,000 Lumen  
36 Watts**

**Safety  
Grommet**

**90° Magnet Mount  
or Hanging**

## Wide Area LED Lighting Stringers

The **Duraline Wide Area LED Lighting Blocks and Streamers** provide safe, effective overhead lighting for any number of purposes and locations. Blocks are typically spaced at either 15' or 20' intervals, and come with molded NEMA 5-15 plugs for easy use, but other connectors are available. Each **Lighting Block** can be equipped with either an **epoxy coated magnet or an attachable grommet assembly**, ideal for hanging and using as temporary lighting. Each fixture weighs approximately 8 lbs and produces up to **5,000 Lumen on only 36 watts**, and all blocks are NEMA 4 rated and have 277/120V input. It is also equipped with a Lexan lens for ultimate durability.

These **Lighting Blocks** can also be molded to any specified interval and length. They are molded in solid, UV stabilized, and flame-retardant rubber. Our molding process ensures no air gaps or voids, and that every part is integrally molded directly to cable. These assemblies are available in either a **90° or 15° configuration**.



**15° Wall Unit  
Magnet Mount**

**NEMA 4  
Outdoor Rated**

90° Magnet Mount	Length	No. of Blocks	Spacing	Cable Size	Total Lumen	Lead and Tail
M194100-014B-012-BLK	12'	1	N/A	14/3	4,300	6' / 6'
M194101-014B-060-BLK	60'	3	20'	14/3	12,900	10' / 10'
M194101-014B-100-BLK	100'	5	20'	14/3	21,500	10' / 10'
M194102-014B-105-BLK	105'	7	15'	14/3	30,100	7.5' / 7.5'
M194103-014B-010-BLK	10'	1	N/A	14/3	4,300	10' / N/A

90° Hanging Streamer	Length	No. of Blocks	Spacing	Cable Size	Total Lumen	Lead and Tail
M194201-014B-060-BLK	60'	3	20'	14/3	12,900	10' / 10'
M194201-014B-100-BLK	100'	5	20'	14/3	21,500	10' / 10'
M194202-014B-105-BLK	105'	7	15'	14/3	30,100	7.5' / 7.5'

15° Magnet Mount	Length	No. of Blocks	Spacing	Cable Size	Total Lumen	Lead and Tail
M194300-014B-012-BLK	12'	1	N/A	14/3	4,300	6' / 6'
M194301-014B-060-BLK	60'	3	20'	14/3	12,900	10' / 10'
M194301-014B-100-BLK	100'	5	20'	14/3	21,500	10' / 10'
M194302-014B-105-BLK	105'	7	15'	14/3	30,100	7.5' / 7.5'
M194303-014B-010-BLK	10'	1	N/A	14/3	4,300	10' / N/A

**\*\*\*OTHER CONFIGURATIONS ALSO AVAILABLE\*\*\***

## **Key Features of Wide Area LED Flood Lighting Blocks:**

- **Over 4,000 Lumen per block, and extremely energy efficient at 30 watts per block.**
- **Shock, vibration, and impact resistant that includes a Lexan polycarbonate lens.**
- **No square or sharp edges on lens or molded block.**
- **Easy and cost effective repair/replacement of lens and driver/LED assembly.**
- **All assemblies include NEMA 5-15 connectors molded directly to the cable.**
- **Each block only weighs 8 pounds when completely assembled.**
- **Custom spacing, lengths, and connectors can be ordered to fit any need.**
- **Outdoor-rated assemblies are perfect for any location.**
- **Safety grommet allows block to be chained in place for extra safety and protection.**



## Replacement Parts

Part Number	Description
A007872	Lexan Lens Diffuser
A007892	2x Magnetic Mount, Black Epoxy Coated
A294051	2x Hanging Grommets
A294055	Driver & LED Assembly
A007910	2x O-Clamps for Pipe-Mounting



Lexan Lens



Epoxy-Coated  
Magnets



Hanging Grommets



LED Driver  
Assembly



O-Clamp

# Duraline®

## Meet the new Mighty LED series of Light Streamers

Duraline's new compact **Mighty LED Light Streamer** will generously illuminate a vast area with its high intensity light. These safe and effective overhead lighting blocks are equipped with either a hanging grommet assembly or magnetic mount, making them ideal for portable job site lighting, tunnels, tents, construction sites, and more.

The durable Lexan lens ensures protection against damage even in the harshest environments, giving the assembly an IP67 rating. These assemblies are molded in solid, UV stabilized, flame-retardant rubber, and our molding process ensures no air gaps or voids, while still offering hassle-free installation of any spare parts.

Every part is integrally molded directly to the cable making it virtually indestructible and is available on 12/3 or 14/3 SOOW cable, with customized configurations to fit your needs perfectly. Each assembly weighs approximately 3 lbs. and produces 1100 lumen, 5000 kelvins, on less than 11 watts. These lights are 6" long, 2.75" wide, and 3" tall. Our full coverage light stringer guarantees years of service!








## Part Numbers

Hook Socket Assembly						
W/ NEMA 5-15 Plugs	Length	No. of Blocks	Spacing	Cable Size	Total Lumen	Lead and Tail
M195105-012B-050-BLK	50'	5	10'	12/3	5,500	5' / 5'
M195105-012B-100-BLK	100'	10	10'	12/3	11,000	5' / 5'
M195105-014B-050-BLK	50'	5	10'	14/3	5,500	5' / 5'
M195105-014B-100-BLK	100'	10	10'	14/3	11,000	5' / 5'
W/O Plugs	Length	No. of Blocks	Spacing	Cable Size	Total Lumen	Lead and Tail
M195101-012B-050-BLK	50'	5	10'	12/3	5,500	5' / 5'
M195101-012B-100-BLK	100'	10	10'	12/3	11,000	5' / 5'
M195101-014B-050-BLK	50'	5	10'	14/3	5,500	5' / 5'
M195101-014B-100-BLK	100'	10	10'	14/3	11,000	5' / 5'


Magnet Socket Assembly						
W/ NEMA 5-15 Plugs	Length	No. of Blocks	Spacing	Cable Size	Total Lumen	Lead and Tail
M195005-012B-050-BLK	50'	5	10'	12/3	5,500	5' / 5'
M195005-012B-100-BLK	100'	10	10'	12/3	11,000	5' / 5'
M195005-014B-050-BLK	50'	5	10'	14/3	5,500	5' / 5'
M195005-014B-100-BLK	100'	10	10'	14/3	11,000	5' / 5'

W/O Plugs	Length	No. of Blocks	Spacing	Cable Size	Total Lumen	Lead and Tail
M195001-012B-050-BLK	50'	5	10'	12/3	5,500	5' / 5'
M195001-012B-100-BLK	100'	10	10'	12/3	11,000	5' / 5'
M195001-014B-050-BLK	50'	5	10'	14/3	5,500	5' / 5'
M195001-014B-100-BLK	100'	10	10'	14/3	11,000	5' / 5'

Replacement Parts	
A295054	LED Lamp Diffuser/Screws Assy
A295055	LED Lighting/Driver/Heatsink Assy 1,100 Lumen
A295057	Magnet Replacement Parts

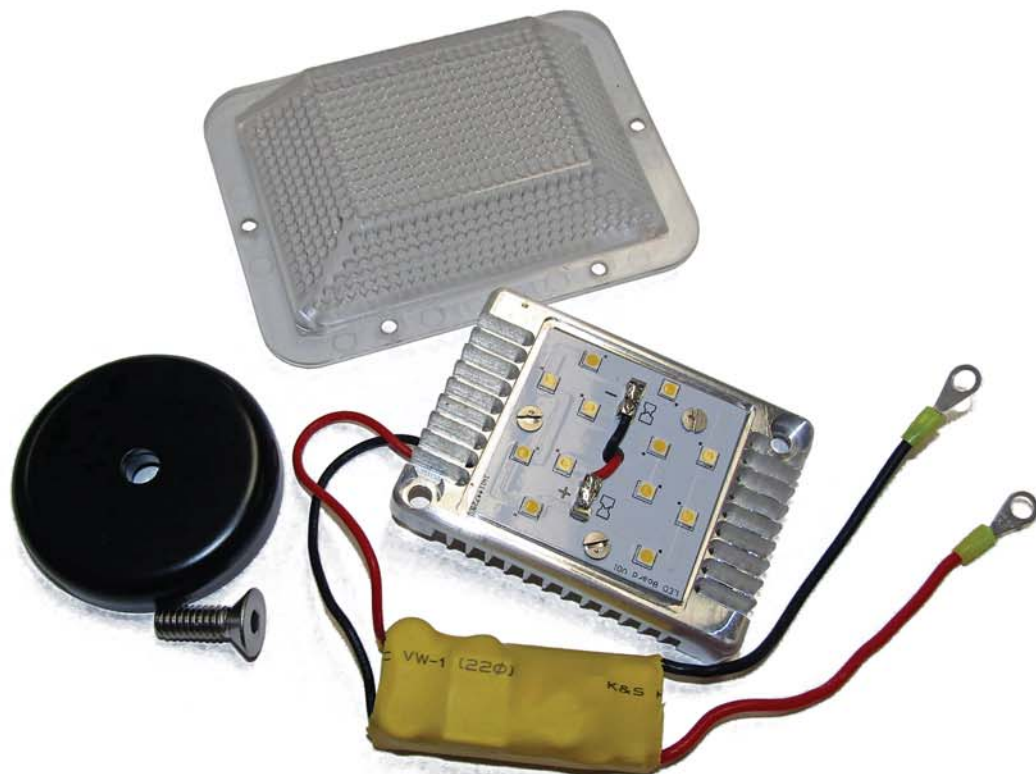



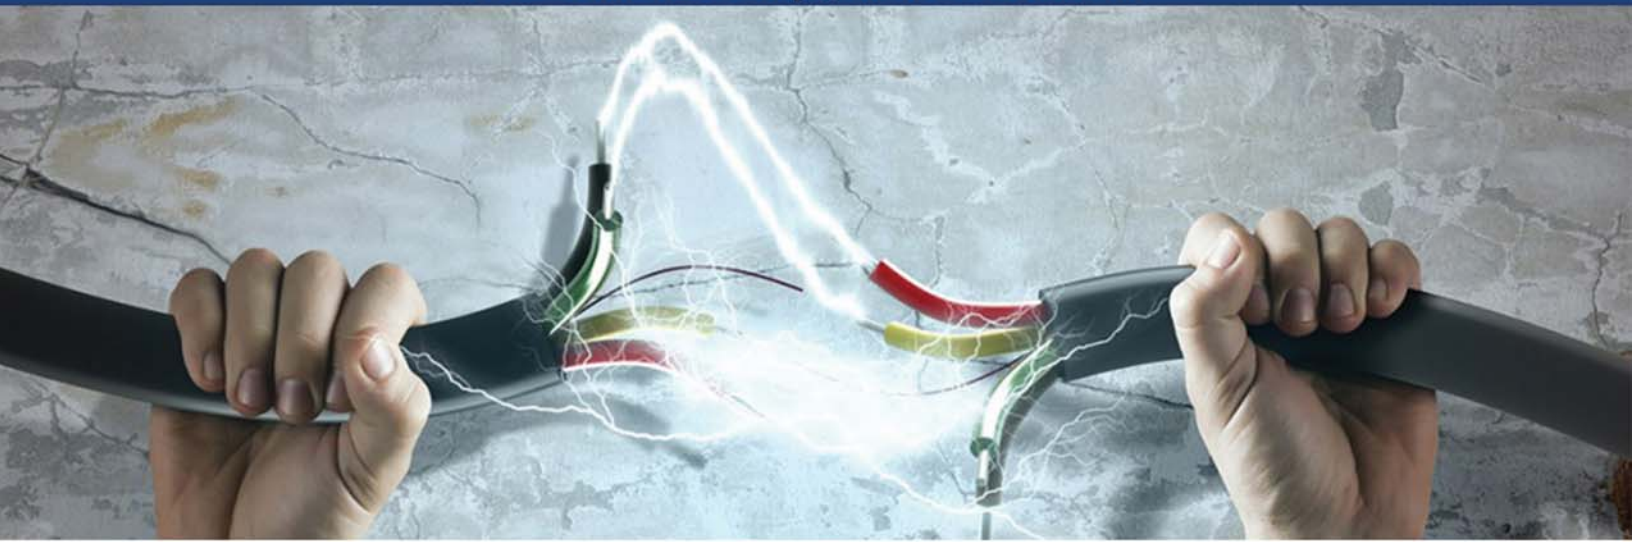

# With over 70 years experience, we know exactly what you need.



Duraline was founded in 1946 as a supplier of safety-engineered electrical distribution systems for the shipbuilding industries. We have since grown to supply diverse industries such as petrochemical, aviation, medical, and entertainment.



Duraline products are proudly made in the U.S.A. All of the manufacturing is done in our Florida facility, established in 2012. To guarantee that our products are safe, we follow the most stringent manufacturing and quality control requirements and manufacture our products to conform with several recognized industry standards.



Duraline is committed to bringing the best product possible to our customers, including developing new products to match any needs our customers might have.

# Duraline®

## Industrial Strength Electrical Products for Industrial Strength Users

Duraline Div. of J.B. Nottingham & Co., Inc.  
1731 Patterson Ave.  
DeLand, FL 32724

Phone: 386-873-2990 | Fax: 386-873-2995

[www.jbn-duraline.com](http://www.jbn-duraline.com)

